

20' Half Height—Removable Side Door Offshore Container 20' x 8' x 4'


DNV/ISO Corner Castings

DNV Certification Note 2.7-1: Offshore Containers

EN 12079: Offshore Containers

ISO 1161 Corner Fittings

The Convention for Safety Containers CSC
Classification Society: Lloyd's Register

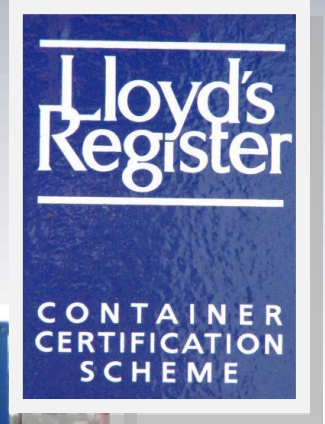

DNV/ISO Corner Casting

Allows for any intermodal means of transportation

Handling Options: Forklift, Crane or Top Lift

Truck, Rail or Ocean Transport

Reduces Dray Costs

Includes

DNV Certified IWRC Wire Rope Lifting Sling

Equipped with Crosby Safety Pin Bow Shackles

And Flemish Steel Splice Terminations

Dimensions		
L x W x H		
20' x 8' x 4'3"		
External	Internal	Capacity
6058 mm (19' 10.4")	5738 mm (18' 9.96")	11.5 Cu.m
2438 mm (8' 0")	2116 mm (6' 11.3")	
1295 mm (4' 3")	945 mm (3' 1.2")	
Ratings		
20,000 kg	44,092 lb	Max Gross
15,650 kg	34,502 lb	Payload
4,350 kg	9,590 lb	Tare (+/- 2%)

